


ULTRASONIC THICKNESS GAUGE DELTA TT-110™

Handheld gauge for steel thickness only

- Easy to operate ultrasonic wall thickness gauge
- Special model for steel only
- Standard 5 MHz transducer included
- Clear 4-Digit LCD display
- Display resolution 0.1 mm
- Mm/inch selectable

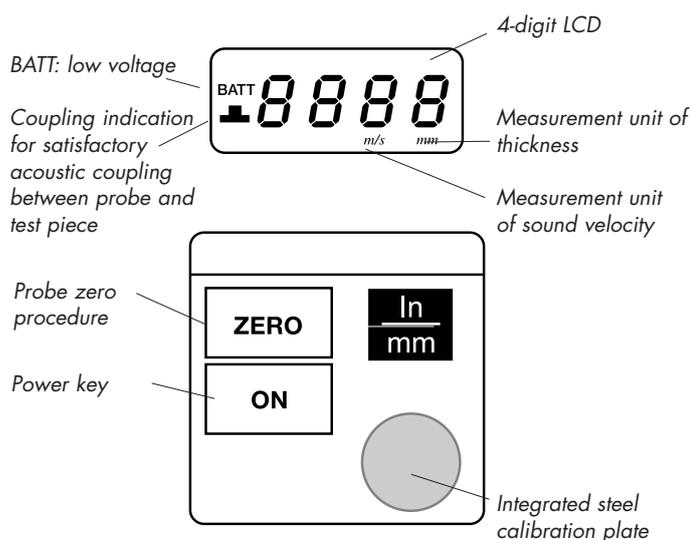

Technical specifications

Measuring range (steel)	1.2mm - 225.0mm with 5 MHz transducer
Measuring range for steel pipes	Minimum 3mm thickness x 20mm diameter
Transducer frequency	Standard 5 MHz, diameter probe 10mm
Display resolution	0.1 mm
Calibration	4.0mm steel base plate integrated
Measurement accuracy	$\pm(1\%H+0.1)$ mm
Measuring units	Mm/inch selectable
Sound velocity	5900m/s
Display	4-Digit LCD
Surface temperature	Standard -10°C to +60°C (high temperature see TT-120)
Battery indicator	Low battery voltage indicator
Power supply	2 pcs AA batteries 1.5V
Operation time	250 hours continuously
Dimensions	126mm x 68mm x 23mm
Weight	Approx. 250gr including batteries

Standard delivery

- Main unit
- Transducer 5 MHz
- Integrated steel calibration plate 4.0mm
- Batteries AA 1.5V (2 pcs)
- Ultrasonic couplant
- Manual
- Certificate
- Carrying case

Optional accessories

- Transducers for special applications